


NEW FOR
2020

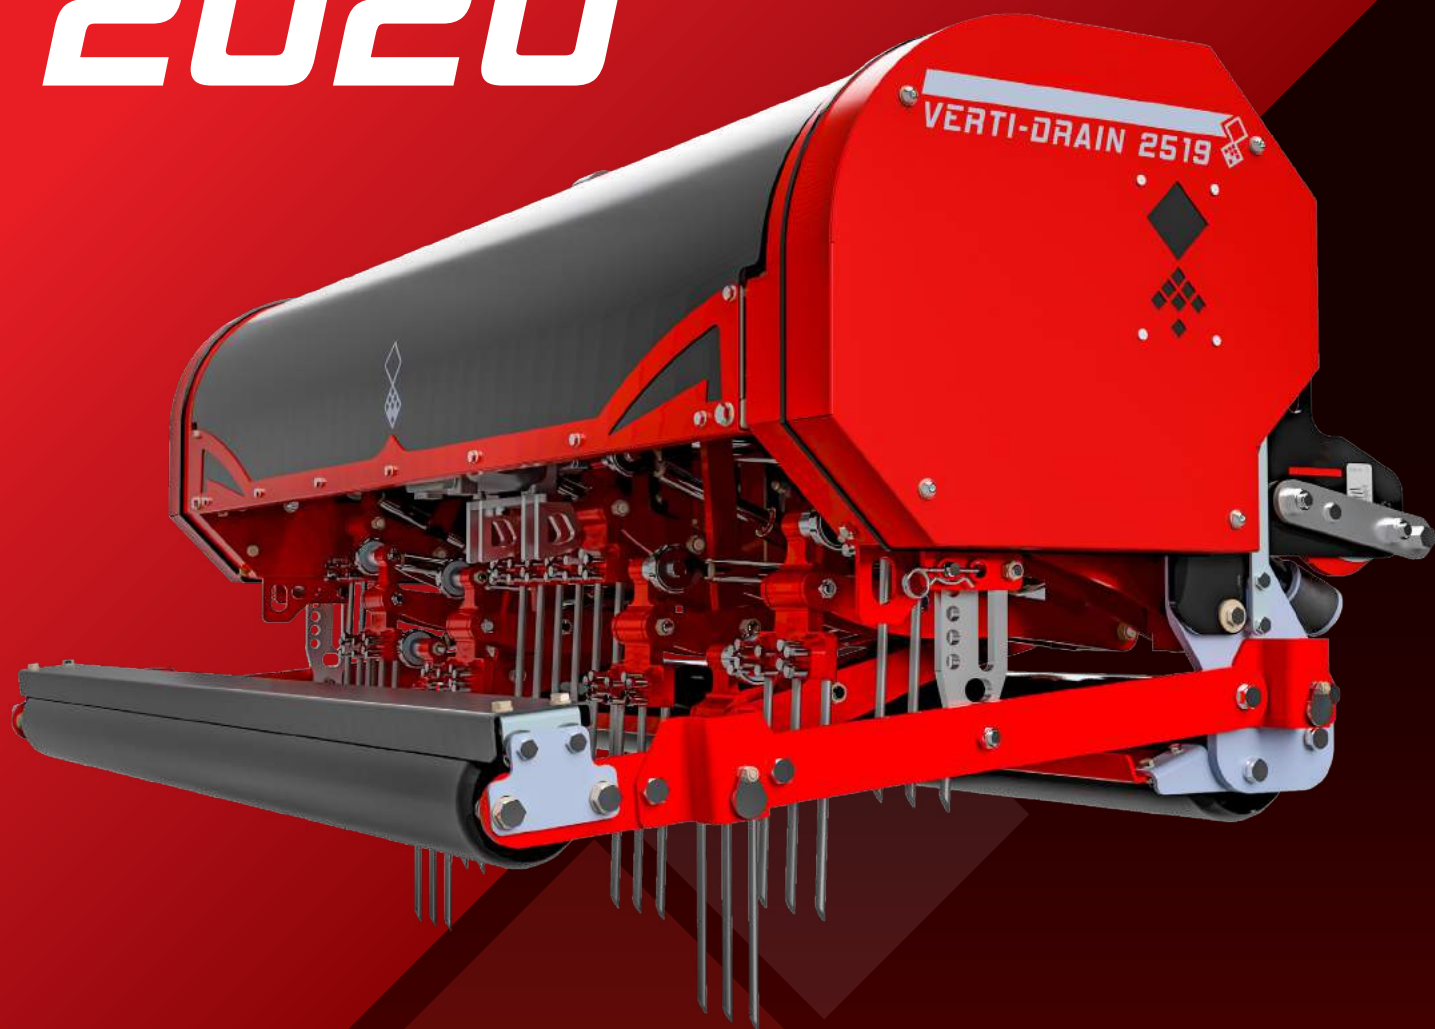

VERTI-DRAIN[®]
2519

***The next
generation
is here...***

Charterhouse
TURF MACHINERY[®]

VERTI-DRAIN[®] 2519

Working width	1.95m (76.7")
Working depth	Up to 250mm (10")
Tractor speed @ 540 rev's at PTO Hole spacing 65 mm (2-1/2") Hole spacing 100mm (4") Hole spacing 165mm(6-1/2")	Up to 1.75km/h (1.08mph) Up to 2.70km/h (1.67mph) Up to 4.45km/h (2.76mph)
PTO speed: (max)	Up to 540 rpm
Weight	Approx. 900kg (1984lbs)
Hole spacing side-to-side	100mm (4") @ 18mm (3/4") holes 65mm (2.5") @ 12mm (1/2") holes
Hole spacing in driving direction	25 – 165 mm (1 – 6-1/2")
Recommended tractor size	60hp with lift capacity of minimum 900kg (1984lbs) at 610mm (24")
Capacity (maximum) Spacing 65 mm (2-1/2") Spacing 100mm (3.9") Spacing 165mm (6-1/2")	Up to 3443sq.m (37055sq.ft)/ hour Up to 5296sq.m (57008sq.ft)/ hour Up to 8739sq.m (94036sq.ft)/ hour
Maximum tine size	Solid 18 x 250mm (3/4"x 10") Hollow 25 x 250mm (1"x 10")
Three point linkage	3-point CAT 1/2
Supplied with	Set solid tines 12mm/250mm (1/2" x 10") Slip clutch PTO Toolbox with combi tool

CONTACT US FOR A DEMONSTRATION

Our commitment is to fully satisfy the needs of our customers. For immediate assistance contact us at:
sales@charterhouse-tm.co.uk

To see the entire range of equipment download the latest copies of our brochures from
www.charterhouse-tm.co.uk

Follow the latest developments on



+44 (0)1428 661222

sales@charterhouse-tm.co.uk

